

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------



The input of this universal level converter, direction decoder and potential isolation amplifier PW 1D-1D accepts as well single-track as double-track incremental encoder signals, which can be implemented as RS422 / TTL or as HTL level (10 ... 30 V). If the signal includes the direction of rotation, this direction can be defined either by a 90° phase shift of channels A and B or by a static direction signal.

The module can be easily and conveniently mounted in a cabinet on a standard DIN rail.

DC 5 ... 30 V Power supply	max. 500 kHz Input frequency	max. 500 kHz Output frequency	AC/DC Potential separation	DIN-rail mounting
---	---	--	--------------------------------------	--------------------------

Characteristics

- High frequency range up to 500 kHz.
- Potential isolation amplifier.
- Level converter and direction decoder for incremental encoder signals.
- Signal inputs (A, /A, B, /B, 0, /0) can be set to HTL, TTL or RS422 levels.
- Processes signals with direction, synchronous, asynchronous, as well as single-track signals.
- Signal outputs (A, /A, B, /B, 0, /0), can be set to HTL, TTL or RS422 levels.
- Conversion of an A/B direction information (90°) into a static direction signal and vice-versa.
- Encoder connection either with Sub-D connector or plug-in screw terminals.

Benefits

- Potential separation between sensor and control.
- Level adaptation for old controls with direction signal input.
- Conversion from TTL into HTL and vice versa.
- Voltage level adaptation to the application.

Order no.		
Level converter	8.PW.1D-1D	<i>Scope of delivery</i> - Level converter - Manual

Cables and connectors		Order no.
Preassembled cables	Sub-D female contacts, 9-pin, with cable outlet 70° single-ended 2 m [6.56'] PVC cable ¹⁾	8.0000.6V00.0002.0086
Connectors	Sub-D female contacts, 9-pin, with cable outlet 70°	8.0000.514B.0000
	Sub-D male contacts, 9-pin, with cable outlet 70°	8.0000.514A.0000

Further Kübler accessories can be found at: kuebler.com/accessories
 Further Kübler cables and connectors can be found at: kuebler.com/connection-technology
 You will find an overview of our systems and components for Functional Safety and the corresponding software in the safety technology section or under www.kuebler.com/safety.

1) Other lengths available.

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------

Technical data

Electrical characteristics	
Power supply	5 ... 30 V DC (residual ripple ≤ 10 % at 24 V DC)
Power consumption (no load)	max. 50 mA
Reverse polarity protection of the power supply	yes
Type of connection	screw terminal, 1.5 mm ²
Encoder supply (can only be supplied externally)	voltage can be supplied at the plug strip and picked off on the Sub-D 9-pin input connector

Mechanical characteristics	
Material	housing plastic
Mounting	35 mm DIN rail (acc. to EN 60715)
Dimensions (W x H x D)	22.5 x 102 x 102 mm [0.89 x 4.02 x 4.02"]
Protection	IP20
Weight	approx. 100 g [3.53 oz]
Working temperature	0 °C ... +45 °C [+32 °F ... +113 °F] non condensing
Storage temperature	-25 °C ... +70 °C [-13 °F ... +158 °F] non condensing
Failure rate (MTBF in years)	71,8 a continuous operation at 60 °C [140 °F]

Approvals	
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU


Incremental input X1, X2	
Level (adjustable)	TTL / RS422 (differential voltage > 1 V) or HTL (10 ... 30 V)
Tracks	TTL symmetrical A, /A, B, /B, 0, /0 HTL asymmetrical A, B, 0
Frequency	TTL symmetrical max. 500 kHz HTL asymmetrical max. 300 kHz (HTL)
Internal resistance	R _i ≈ 10 kOhm
Type of connection	screw terminals, 1.5 mm ² Sub-D male contacts, 9-pin

Incremental output X3, X4	
Level	approx. 2 V lower than input voltage
Tracks	A, /A, B, /B, 0, /0
Output current	max. 30 mA (per channel)
Output stage	Push-Pull
Signal propagation time	approx. 600 ns
Type of connection	screw terminals, 1.5 mm ² Sub-D female contacts, 9-pin

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------

Terminal assignment

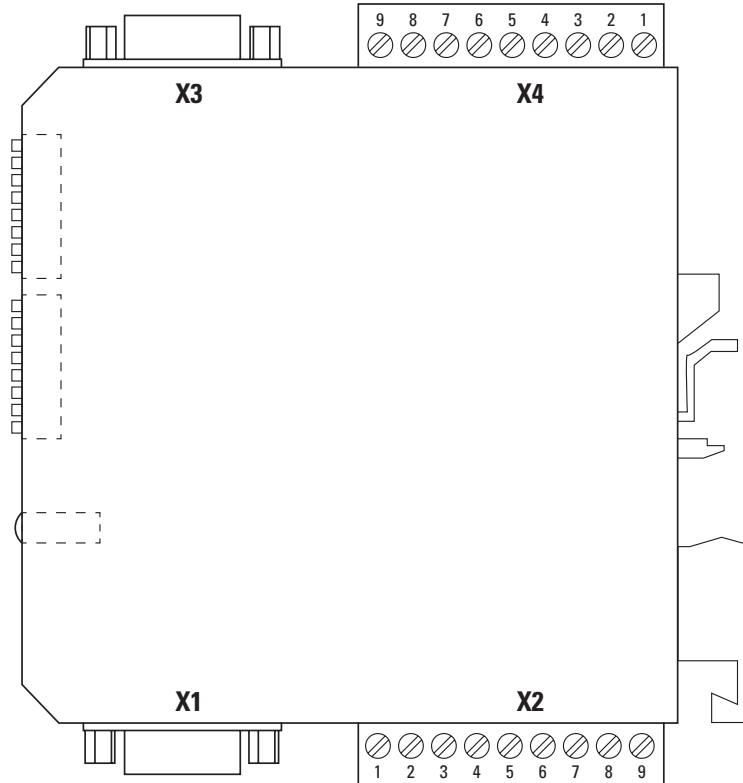

Interface	Function	Screw terminal, 9-pin									
Connection X2		Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\oplus
	Input TTL / RS422	Pin :	9	8	7	6	5	4	3	2	1
	Input HTL	Pin :	9	8	7	–	5	–	3	–	1

Interface	Function	Sub-D male contacts, 9-pin									
Connection X1		Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	–
	Input TTL / RS422	Pin :	5	4	3	2	1	9	7	6	8
	Input HTL	Pin :	5	4	3	–	1	–	7	–	8

Interface	Function	Screw terminal, 9-pin									
Connection X4		Signal:	GND	V_{in}	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\oplus
	Output TTL / RS422	Pin :	1	2	3	4	5	6	7	8	9
	Output HTL	Pin :	1	2	3	–	5	–	7	–	9

Interface	Function	Sub-D female contacts, 9-pin									
Connection X3		Signal:	GND	V_{in}	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	–
	Output TTL / RS422	Pin :	5	4	3	2	1	9	7	6	8
	Output HTL	Pin :	5	4	3	–	1	–	7	–	8

- +V : Power supply encoder
- 0 V : Encoder power supply ground GND1 (0 V)
- V_{in} : Power supply level converter
- GND : Level converter power supply ground (0V)
- A, \bar{A} : Incremental output channel A (Cosine)
- B, \bar{B} : Incremental output channel B (Sine)
- 0, $\bar{0}$: Reference signal

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------

Dimensions

Dimensions in mm [inch]

